





SKU: BV5075

-  Brass Ball Valve EN331 British Gas Approved
-  Messingkugelventil EN331 British Gas Zugelassen
-  Aprobado Latón Válvula de bola EN331 British Gas
-  Laiton Ball Valve EN331 British Gas Approuvé

**Valves**<sup>™</sup>  
O N L I N E

- 1/4 " - 1" Brass nickel plated body ball valve
- 1/4 "- 1" Messing vernickelt Kugelhahn Körper
- 1/4 " - 1" Níquel Latón válvula de bola de cuerpo chapado
- 1/4 " - 1" Laiton nickelé vanne à boisseau sphérique du corps plaqué

**Brass Ball Valve, Yellow  
Butterfly Lever. F x F  
BSPP**



#### Description

Full bore screwed BSPP female x female ball valve, with Yellow PVC Coated Butterfly handle. 1/2" PN64, 3/4" - 1" PN40. Temperature Range -20°C to 150°C.



#### Beschreibung

Voller Durchgang geschraubt BSPP weiblichen x weibliche Kugelhahn, mit gelbem PVC beschichtete Schmetterling Griff 1/2 " PN64 , 3/4 " - . 1 " PN40 Temperaturbereich -20 ° C bis 150 ° C .



#### Descripción

Paso total atornillado hembra BSPP x válvula de esfera femenina , con el PVC amarillo Mariposa Revestida handle. 1 / 2 " PN64 , 3/4 " - 1 " PN40 Rango de temperatura de -20°C a 150°C .



#### Descripción

Passage intégral vissé BSPP femelle x vanne à boisseau sphérique femelle, avec PVC papillon jaune couché poignée. 1 / 2 " PN64 , 3/4 " - 1 " PN40 Température de -20°C à 150°C .

- EN331 BG Certified
- WRAS Approved
- Full Bore
- Butterfly Lever

#### Description





Brass nickel plated , full bore ball valve – certified to EN331 British Gas and WRAS approved. Screwed BSPP Female with PTFE Seats, NBR/Viton stem O Rings, Anti-Blow Out Stem. Yellow Butterfly Lever

**Typical Applications** For Isolation of industrial and domestic process. Heating, Hot water, Cold water, oil, fuel, gas and air pipe systems



**BSI Gas Approved**

**WRAS**  
APPROVED  
PRODUCT

-  Brass Ball Valve EN331 British Gas Approved
-  Messingkugelventil EN331 British Gas Zugelassen
-  Aprobado Latón Válvula de bola EN331 British Gas
-  Laiton Ball Valve EN331 British Gas Approuvé


## 2/2 Manual brass ball valve with butterfly handle

### Description

Brass Nickel Plated , Full Bore Ball Valve - EN331 British Gas and WRAS approved, screwed BSPP Female, PTFE Seats, NBR/Viton stem O Rings, Anti-Blow Out Stem. Yellow butterfly handle.

**Typical Applications** For Isolation of industrial and domestic process. Heating, Hot water, Cold water, oil, fuel, gas and air pipe systems

**Options** There are many options with regard to operators and threads:- Butterfly Lever, Lockable Lever Neck Extensions (good if lagging is required) Male x Female Thread, High pressure.

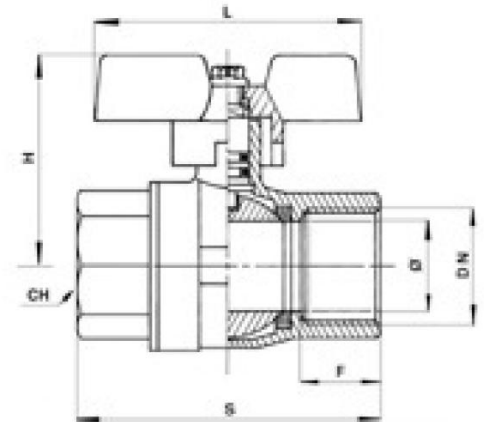

### Dimensions

DN	Size	F	H	L	S	CH	Kg
8	1/4"	12.5	38	52	45	17	0.13
10	3/8"	12.5	40	52	45	20	0.15
15	1/2"	17	45	60	59	25	0.25
20	3/4"	18	53	73	69	31	0.4
25	1"	22	57	73	83	38	0.6

### Material List

Body	Brass Nickel Plated
Ball	Brass
Seats	PTFE
Stem	Brass
Stem O-Ring	Viton/NBR
Handle	Aluminium

### Pressure / Temperature Ratings

Max Pressure	1/4" 1/2" PN64
	3/4" to 1" PN40
Temperature Gas	-20°C to 70°C
Temperature Fluid	-20°C to 150°C

### Kv Coefficients

Size	KV
1/4"	4,1 -
3/8"	6.3
1/2"	15.8
3/4"	29
1"	50
1"1/4	82
1"1/2	184
2"	340
2"1/2	580
3"	940
4"	1600



**BSI Gas Approved**

**WRAS**  
APPROVED  
PRODUCT