






SKU: BV5062

-  Mini Ball Valve F x F, Winged Lever Operator
-  Mini -Kugelhahn F x F, Winged Lever Operator
-  Mini Válvula de bola F x F , con alas de palanca del operador
-  Mini Ball Valve F x F, Winged levier opérateur

Valves[™]
O N L I N E

- 1/4 " – 1/2" Mini brass sandblasted nickel plated ball valve
- 1/4 " – 1/2" Mini Messing sandgestrahlt vernickelt Kugelhahn
- 1/4 " – 1/2" Mini latón níquel satinado válvula de bola plateada
- 1/4 " – 1/2" Mini laiton nickelé sablé vanne à boisseau sphérique plaqué

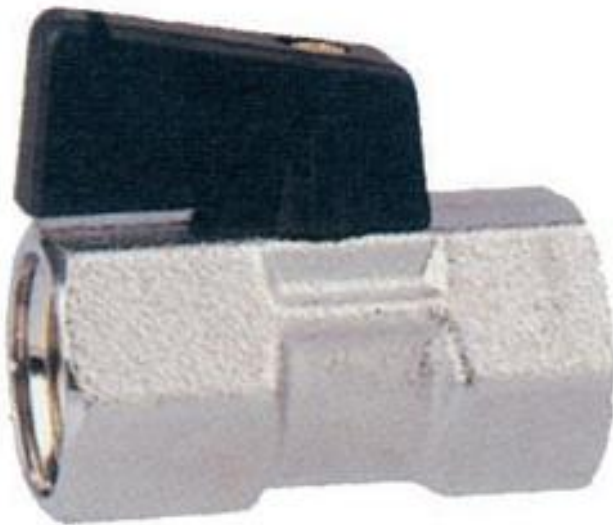

Brass Ball Valve Winged Lever F x F BSPP

- Sandblasted and Nickel Plated
- Winged Lever
- Screwed BSPP
- -10°C to 90°C
- PN16 Rated

DESCRIPTION

Nickel plated F x F, mini ball valve with winged lever operator, for use on pneumatic and liquid applications. Valve offers reliable on / off operation.



Description

Sandblasted and nickel plated mini ball valve with winged operator, reduced bore screwed BSPP female x female. 1/4" – 1/2" PN16, Temperature Range -10° C to 90° C. Typically used in pneumatic systems, HVAC and small industrial isolation use.



Beschreibung

Sandgestrahlt und vernickelt Mini-Kugelhahn mit Flügelbetreiber, reduzierter Durchgang geschraubt BSPP weiblichen x weiblich. 1/4 " - 1/2" PN16, Temperaturbereich -10 ° C bis 90 ° C Typischerweise in Druckluftanlagen , Klimatechnik und kleine IndustrieisolationGebrauch verwendet .



Description

Arenado y niquelado de mini válvula de bola con el operador alado , paso reducido atornillado BSPP hembra x hembra . 1/4 " - 1/2" PN16 , Rango de temperatura de -10 ° C a 90 ° C.





Normalmente se utiliza en sistemas neumáticos , HVAC y los pequeños el uso de aislamiento industrial.



Descripción

Sablé et nickelé mini- vanne à boisseau sphérique avec opérateur ailé, alésage réduit vissé BSPP femelle x femelle. 1/4 " - 1/2" PN16 , plage de température -10 ° C à 90 ° C.


Généralement utilisé dans les systèmes pneumatiques , CVC et petite utilisation d'isolation industrielle .

-  Mini Ball Valve F x F, Winged Lever Operator
-  Mini -Kugelhahn F x F, Winged Lever Operator
-  Mini Válvula de bola F x F , con alas de palanca del operador
-  Mini Ball Valve F x F, Winged lever opérateur

2/2 Mini brass ball valve with winged lever

An aesthetically pleasing nickel plated, polished mini ball valve. Reduced bore screwed BSP female x female. Operated via a winged lever with 90° turn.

Typical Applications: Isolation on Pneumatic system in small areas where a lever valve will not fit.

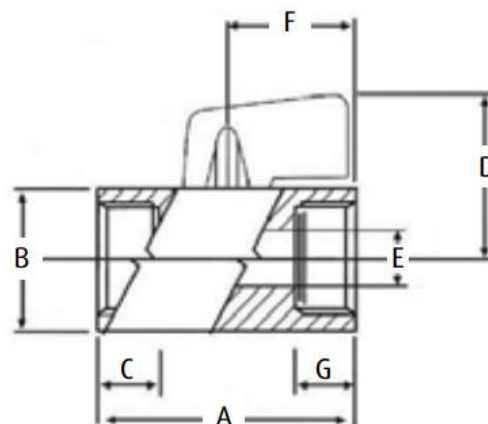

Dimensions shown are for guidance only

Dimensions							
DN	G	C	A	E	D	F	Kg
1/4"	11	11	39	6	29	19	0.09
3/8"	11	11	43	6	29	19	0.09
1/2"	11	11	47	10	29.5	23	0.12

Material List	
Body	Sandblasted, Nickel plated brass
Sleeve	Brass
Ball	Brass nickel plated
Seat	PTFE
Stem O-ring	NBR
Handle	Glass Fibre Reinforced Nylon

Pressure / Temperature Ratings	
Working Pressure	PN16
Temperature	-10°C to 90°C