





SKU: CV4661

-  Brass Spring Check Valve Screwed BSP
-  Messing Feder Rückschlagventil geschraubt BSP
-  Resorte de cobre amarillo válvula de retención Screwed BSP
-  Brass Printemps Vérifiez Screwed Valve BSP

Valves[™]
O N L I N E

- 3/8" - 4" Screwed BSP Brass Spring Check Valve
- 3/8" - 4" Screwed BSP Messing Feder Rückschlagventil
- 3/8" - 4" Rosca BSP resorte de cobre amarillo válvula de retención
- 3/8" - 4" BSP vissé Brass printemps Check Valve

Brass Spring Check Valve



Description

Europa non return valve with a brass body and a 316 stainless steel plate and spring.

Washer NBR Disc

Screwed BSP PN25

Temperature range of;

-20°C to 100°C

Threads: ISO228 (Equivalent to DIN EN ISO 228 and BE EN ISO 228)

Suitable for water services, heating and air-conditioning plants, compressed air systems.

Fitted with a stainless basket this NRV becomes a functional Foot Valve



Description

Reliable brass spring plate check valve, screwed BSP. This reliable non return valve can allow pressures of up to 25 Bar and temperatures of 100°C. Fitted with a stainless steel basket it becomes a fully functional foot valve.



Beschreibung

Zuverlässige Messing Federteller Rückschlagventil geschraubt BSP . Diese zuverlässige Rückschlagventil können Drücke von bis zu 25 bar und Temperaturen von 100 ° C ermöglichen. Ausgestattet mit einem Edelstahlkorb es zu einem voll funktionsfähigen Bodenventil







Descripción

Válvula de retención de la placa de la primavera de latón fiable , rosca BSP . Esta válvula de retención fiable puede permitir presiones de hasta 25 bar y temperaturas de 100 ° C . Equipado con una canasta de acero inoxidable se convierte en una válvula de pie completamente funcional.




Description

Fiable laiton printemps chèque de plaque valve, visser BSP . Cette valve anti-retour fiable peut permettre à des pressions allant jusqu'à 25 bar et des températures de 100 ° C . Equipé d'un panier en acier inoxydable, il devient un clapet de pied entièrement fonctionnel

-  Brass Spring Check Valve Screwed BSP
-  Messing Feder Rückschlagventil geschraubt BSP
-  Resorte de cobre amarillo válvula de retención Screwed BSP
-  Brass Printemps Vérifiez Screwed Valve BSP


Brass Spring Check Valve

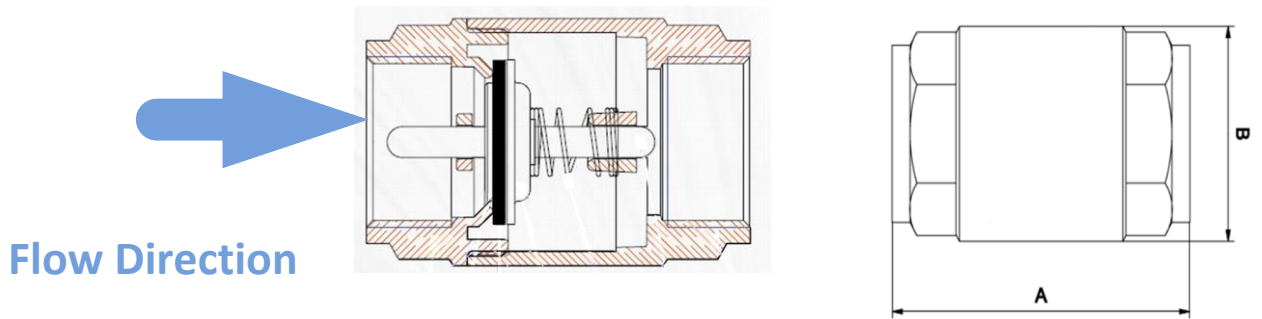

Dimensions						Pressure Bar	Weight Kg
Size	L	H	F1	H1	L1		
3/8"	45	28	8	50	26	16	0.14
1/2"	48	30	8	50	26	16	0.13
3/4"	53	37	9	57	32	16	0.19
1"	89	44	9	57	41	16	0.24
1 1/4"	66	56	11	68	48	10	0.35
1 1/2"	71	67	11	78	55	10	0.53
2"	80	78	12	95	68	10	0.75
2 1/2"	93	103	13	98	86	8	1.69
3"	104	111	14	113	99	8	1.98
4"	119	140	14	131	122	8	3.69

Stainless Steel filter can be supplied to screw into the check valve making it into a foot valve.

Cracking Pressure – water
0.02 Bar

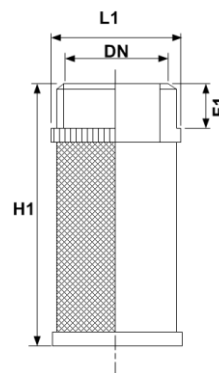

FOOT VALVE

Material List		
Item	Description	Material
1	Body	Brass
2	Plate	Stainless Steel
3	Seal	NBR
4	Spring	Stainless Steel